


G200P MODEL



Reliable and easy to use AISI 304 stainless steel crane scales suitable for indoor and outdoor use, for industrial weighing applications. Reduced lifting distance of the crane. IP67 protection from dust and rain. Available also CE-M APPROVED. Fitted with test certificate obtained with sample weights.

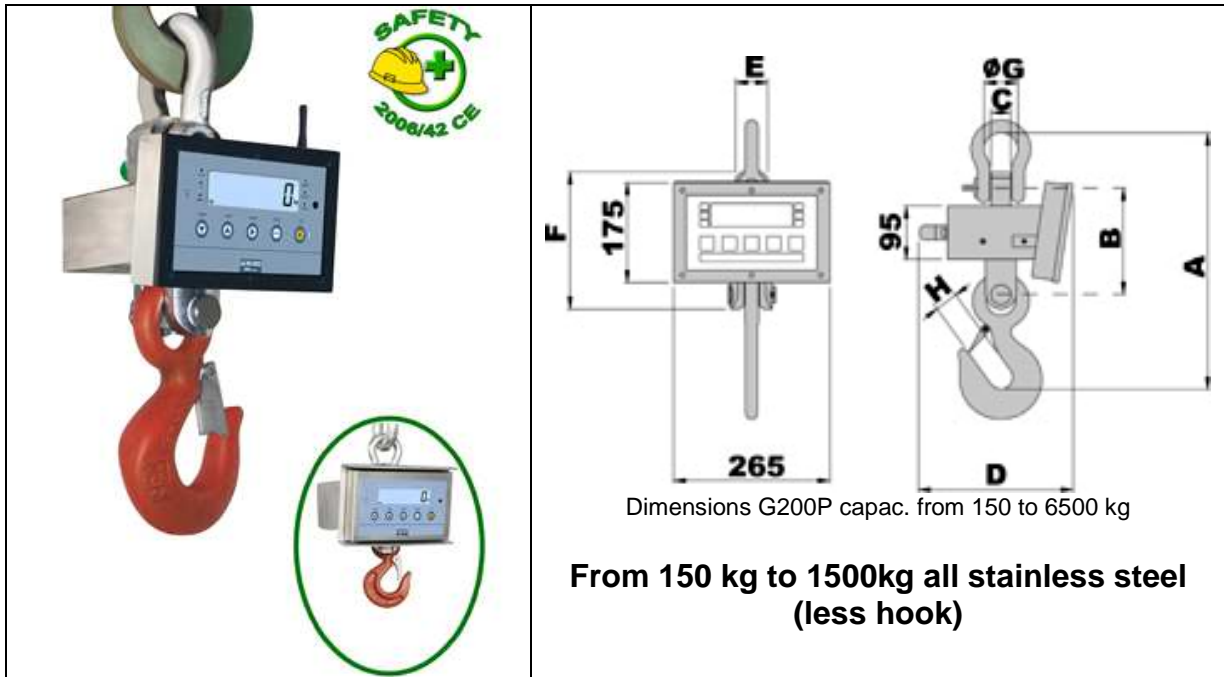

MAIN FEATURES

- Large backlit 25mm LCD display easily visible in all lighting conditions and also with low temperatures.
- Fitted with standard approved upper galvanized shackle and standard approved bottom swivelling hook.
- Reduced distance between the upper shackle and bottom hook.
- Precision: +/- 0.05% F.S.
- Waterproof keyboard with 5 keys: ZERO, AUTOMATIC TARE, MODE, PRINT, and ON/OFF.
- MODE-key configurable as:
PEAK (maximum value read), HOLD (blocking the weight viewed), Weights accumulation, lb/kg/N conversion.
See the user manual for the list of the functions.
- IP67 stainless steel case (dust and rain).
- Fitted with remote control for up to an 8 m distance. The remote control may be configured by the customer as automatic tare only, or as a remote keypad.
- Rechargeable sealed battery with a 40-hour life battery. On request, it is available a second battery for a 24/7 use.
- Equipped with 230Vac 50 Hz battery charger.
- Operating temperature: -10 /+40 °C.
- Programmable digital filter and auto switch-off.

DIMENSIONS

Code	Dimensions (mm)								Weight in kg (including packing)
	A	B	C	D	E	F	G	H	
G200P150	321	160	24	260	45	200	43	30	20
G200P300	321	160	24	260	45	200	43	30	20
G200P600	321	160	24	260	45	200	43	30	20
G200P1500	390	160	34	260	45	200	58	38	20
G200P3000	450	187	34	260	55	240	58	38	16
G200PT6	450	187	34	260	55	240	58	47	16

NOTE: the approved models have the same dimensions as those for internal use

AVAILABLE VERSIONS

Code	Divisions Kg	Divisions CE-M Kg	Capacity Kg
G200P150	0,02		150
G200P300	0,05		300
G200P600	0,1		600
G200P1500	0,2		1500
G200P3000	0,5		3000
G200PT6	1		6500
G200P150M M		0,05	150
G200P300M M		0,1	300
G200P600M M		0,2	600
G200P1500M M		0,5	1500
G200P3000M M		1	3000
G200PT6M M		2	6000

NOTE: G200PT12 and G200PT25 models are without swivelling hook (see accessories)

ACCESSOIRES

Code	Descriptions
GG15	Swivelling bottom hook with safety lock 15 t
GG22	Swivelling bottom hook with safety lock 22 t
GG30	Swivelling bottom hook with safety lock 30 t
CA2	Connection ring 2.5 t
CA4	Connection ring 4 t
CA8	Connection ring 8 t
CA15	Connection ring 15 t
CA30	Connection ring 30 t

Code	Dimensions (mm)			
	A	B	C	D
GG15	95	354	96	455
GG22	121	432	120	565
GG30	133	568	139	667
CA2	86	60	110	
CA4	111	75	135	
CA8	152	100	180	
CA15	174	110	200	
CA30	270	180	340	

