


3



Precision balance with flexible functionality and touch display

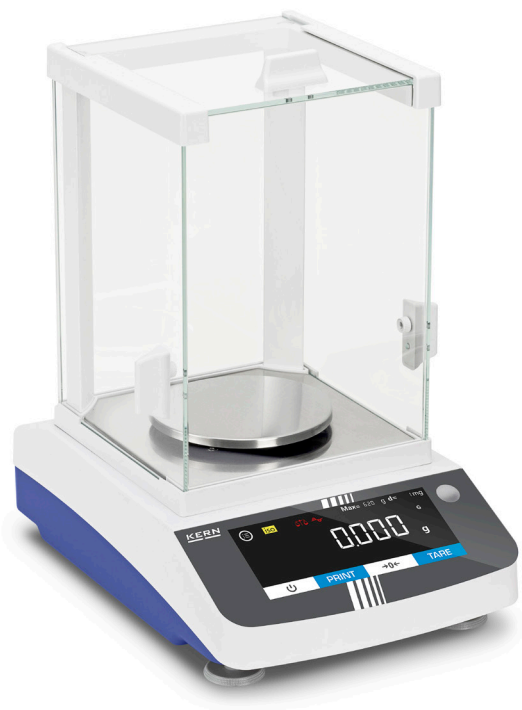

The modern touch display enables convenient operation



Also available with a larger weighing surface



In a GLP-compliant print protocol all weights can be documented, including date, time and identification number.

Features

- The wide range of functions of this range of precision balances means that they qualify for use in the pharmaceutical industry as well as other fields. These include, for example, the statistical function, weighing with tolerance range, counting function, percentage weighing, totalizing function and many more
- Modern touch display with convenient operation enables you to, for example, switch the units or start adjustment straight from the display
- The Windows Direct function allows weights to be transferred directly from the balance to a Windows application via a USB device connection, without the need for manual entry
- Draught shield standard for models with [d] = 0,001 g, weighing space W×D×H 174×162×228 mm
- GLP/ISO record keeping with date, time and identification number of balance adjustment or weighing process
- Assists in data integrity in accordance with U.S. FDA 21 Part 11 (for example weighing result, sample ID, user name, scales ID, ...)
- KERN Communication Protocol (KCP): The KCP permits searching and remote control of the balance using external control devices or computers, see page 19
- Underfloor weighing: load support on the underside of the balance for models. Loop for underfloor weighing, standard
- RS 232 data interface and USB (Device) for the transfer of weighing data
- Menu language EN

Technical data

- Backlit LCD display, digit height 20 mm
- Dimensions weighing surface, stainless steel
 - A** ∅ 115 mm
 - B** W×D 185×185 mm
- Overall dimensions W×D×H
 - A** 207×318×360 mm
 - B** 207×318×110 mm
- Permissible ambient temperature 15 °C/25 °C


Accessories

- Protective dust cover, KERN ABS-A08
- Weighing table to absorb vibrations and oscillations, which would otherwise distort the weighing result, KERN YPS-03
- Antivibration plate 400×450×60 mm, KERN YPS-04 565×450×60 mm, KERN YPS-05
- Ioniser to neutralise electrostatic charge, KERN ABP-A01
- Equipment qualification: compliant qualification concept with Installation and Operating Qualification (IQ, OQ), for details see page 232
- Further details, plenty of further accessories and suitable printers see *Accessories*

3

The main scope of applications is:

- Laboratories
- Pharmaceutical industry
- Chemical industry
- Food industry
- Plastics industry
- Quality laboratories



Model	Weighing capacity [Max] g	Readability [d] g	Reproducibility g	Linearity g	Net weight kg	Weighing plate	Options
							DAKkS Calibr. Certificate DAKkS KERN
Models with external adjustment							
PDS 300-3	320	0,001	0,003	± 0,003	6	A	963-127
PDS 600-3	620	0,001	0,003	± 0,003	6	A	963-103
PDS 1000-3	1020	0,001	0,004	± 0,005	6	A	963-103
PDS 2000-2	2200	0,01	0,03	± 0,03	3,6	B	963-127
PDS 4000-2	4200	0,01	0,03	± 0,03	3,6	B	963-127
PDS 6000-2	6200	0,01	0,03	± 0,03	3,6	B	963-104
Models with internal adjustment							
PDT 300-3	320	0,001	0,003	± 0,003	6	A	963-127
PDT 600-3	620	0,001	0,003	± 0,003	6	A	963-103
PDT 1000-3	1020	0,001	0,004	± 0,005	6	A	963-103
PDT 2000-2	2200	0,01	0,03	± 0,03	3,6	B	963-127
PDT 4000-2	4200	0,01	0,03	± 0,03	3,6	B	963-127
PDT 6000-2	6200	0,01	0,03	± 0,03	3,6	B	963-104